


Product Data Sheet

Knauf Moistureshield Plasterboard

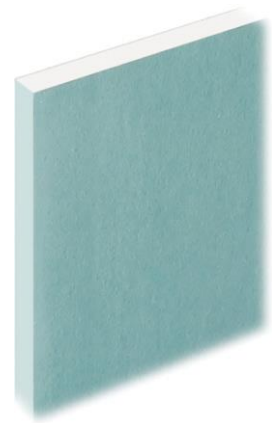

Knauf Moistureshield Plasterboard is a high-performance plasterboard for use in internal areas of high humidity. Suitable for wall and ceiling installations.

Moistureshield Plasterboard is made from an aerated gypsum core, with unique additives and special premium paper liners on either side. Can be finished with Knauf Jointing Products and Knauf Ready mix spray finish before decoration.

Areas of Application

Suitable for partitions, linings and ceilings in humid environments.

Compliance Standards

AS/NZS 2588:2018;GB9775-2008;

EN520 A & H

Key Benefits

- Strong and versatile
- Enhanced levels of moisture
- performance Choice of tapered or square edge
- Fully recyclable
- Quick and easy to install
- Multiple layers can be used for added

Performance Data

Thickness Meter (mm)	Reaction to Fire (R2F)	Water Absorption (%)	Surface Water Absorption (g/m ²)	Weight Per Square (kg/m ²)
9.5	A2-s1, d0 (B)	≤5	≤160	6.5
10	A2-s1, d0 (B)	≤5	≤160	6.7
12	A2-s1, d0 (B)	≤5	≤160	8.5
13	A2-s1, d0 (B)	≤5	≤160	8.8