


## Product Data Sheet

# Knauf Fireshield Plasterboard

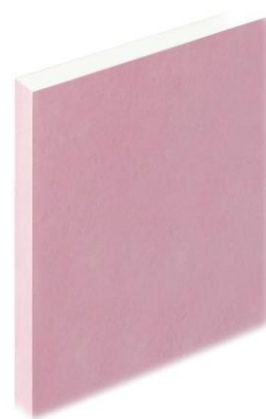

Knauf Fireshield Plasterboard offers improved fire protection when used as part of a full Knauf system. Fireshield Plasterboard can be used in applications that require greater fire protection in systems such as shaftwalls, C stud linings and partitions.

Made from aerated gypsum core, with premium paper liners on either side. Knauf Fireshield Plasterboard can be finished with Knauf Jointing Products and Knauf Ready mix spray finish before decoration.

### Areas of Application

Suitable for partitions, walls and ceiling applications where superior fire protection is required.

Fireshield Plasterboard is not suitable for areas of high humidity.

### Compliance Standards

AS/NZS 2588:2018 ; GB9775-2008

EN520 Type A & F

### Key Benefits

- Strong and versatile
- Enhanced fire
- Performance
- Choice of tapered or square
- Edge Fully recyclable
- Quick and easy to install
- Multiple layers can be used for added

### Performance Data

Thickness Meter (mm)	Reaction to Fire (R2F)	Fire Stability (min)	Weight Per Square (kg/m <sup>2</sup> )
12	A2-s1, d0	> 20min	11.1
13	A2-s1, d0	> 20min	11.8
15	A2-s1, d0	> 20min	14.5